



READ ME
FIRST

DIY ALERT RANGE

Garage Parking Sensor




EN

Instruction Manual

AT A GLANCE

Thank you for purchasing the Garage Parking Sensor from Swann. Follow the instructions in this guide to get started.

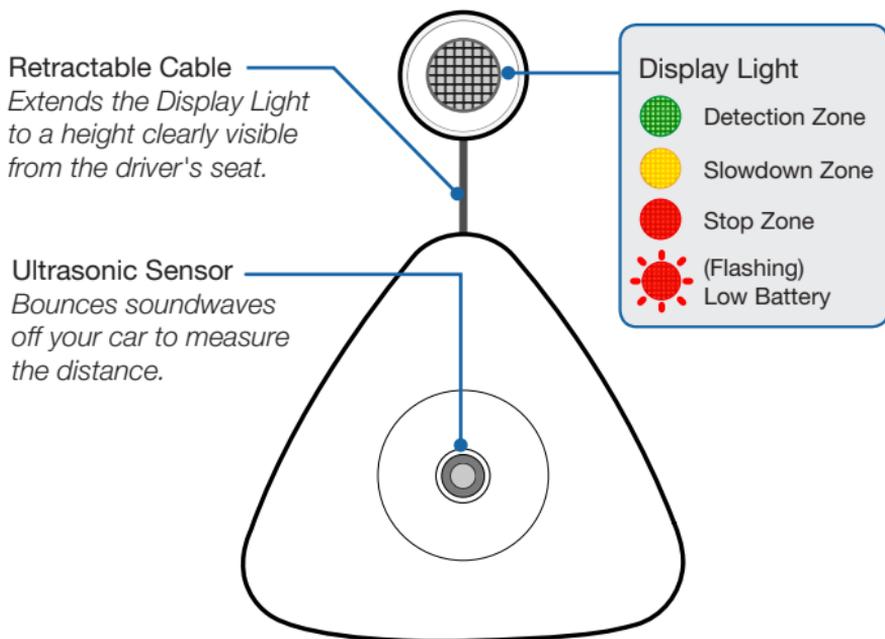

INSTALLING BATTERIES

- 1 Open the battery cover on the rear of the Sensor.
- 2 Insert 4 AA batteries (not included). The use of new alkaline batteries is recommended for optimal performance. Be sure to install batteries according to the polarity markings (+ and -) shown inside the battery compartment.
- 3 Snap the battery cover back into place.

MOUNTING THE GARAGE PARKING SENSOR

You can use either screws to hang the Garage Parking Sensor (through the keyhole slots on the rear), or double-sided adhesive pads to stick the Garage Parking Sensor on the wall surface.

Note: If you are mounting to brick or concrete wall using screws, it's recommended to also use appropriate wall plugs.

Placement Tip: While the exact location for mounting the Sensor will vary across all vehicles, it's ideally installed at the same level as the car bumper, along the wall facing the center of the parking space.

SETTING THE STOPPING DISTANCE

The Garage Parking Sensor has 3 selectable stopping distances - 1, 2 and 3 feet. To set the stopping distance, slide the switch on the rear of the Sensor to the desired stopping distance.

Settings	1 ft	2 ft	3 ft	Timeout
 Detection zone	2-5 ft	3-5 ft	4-5 ft	20 seconds
 Slowdown zone	1-2 ft	2-3 ft	3-4 ft	10 seconds
 Stop zone	1 ft	2 ft	3 ft	15 seconds

Note: Measurements shown above are approximate. Actual stopping distances may vary due to environmental factors (wind, air temperature, etc). As such, it's important to check your response time and leave sufficient clearance to avoid any collision. When parking for the first time, find out the ideal stopping distance for your vehicle and adjust the stopping distance setting or mounting location, if necessary.

TESTING THE GARAGE PARKING SENSOR

Drive your car slowly into the garage. As your car approaches the Sensor, the Display Light illuminates green, then yellow and finally red when you should completely stop your car.

Important: The Garage Parking Sensor is designed to aid in slow-speed parking only. Always follow safe driving procedures when parking your car.

Technical Support

All Countries E-mail: tech@swann.com

Telephone Helpdesk

USA	1800 627 2799	NEW ZEALAND	0800 479 266
AUSTRALIA	1800 788 210	UK	0808 168 9031

Limited Warranty Terms & Conditions

Swann Communications warrants this product against defects in workmanship and material for a period of one (1) year from its original purchase date. You must present your receipt as proof of date of purchase for warranty validation. Any unit which proves defective during the stated period will be repaired without charge for parts or labour or replaced at the sole discretion of Swann. The end user is responsible for all freight charges incurred to send the product to Swann's repair centres. The end user is responsible for all shipping costs incurred when shipping from and to any country other than the country of origin.

The warranty does not cover any incidental, accidental or consequential damages arising from the use of or the inability to use this product. Any costs associated with the fitting or removal of this product by a tradesman or other person or any other costs associated with its use are the responsibility of the end user. This warranty applies to the original purchaser of the product only and is not transferable to any third party. Unauthorized end user or third party modifications to any component or evidence of misuse or abuse of the device will render all warranties void.

By law some countries do not allow limitations on certain exclusions in this warranty. Where applicable by local laws, regulations and legal rights will take precedence.

For Australia: Our goods come with guarantees which cannot be excluded under Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to major failure.

FCC Notice

This equipment has been tested and found to comply with the limits for Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and the receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected
- Consult the dealer or an experienced radio/TV technician for help

WARNING: Modifications not approved by the party responsible for compliance could void user's authority to operate the equipment.

